

ORDERING CODES RMF FILTERS

Filter type: MWV vacuum dehydration unit
(MiniWaterVac purifier)

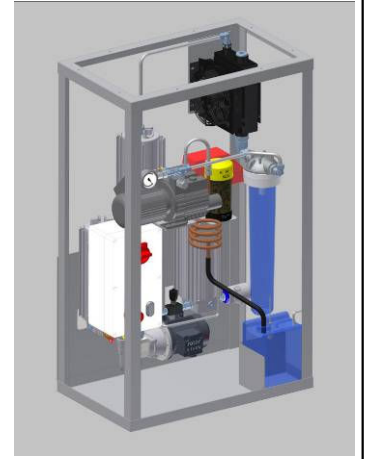


Table 1	Table 2	Table 3	Table 4	Table 5	Table 6	Table 7	Table 8	Table 9	Table 10
MWV									

Table 1 Basic configuration

MWV	MiniWaterVac oil purifier	Industrial and maritime applications
-----	---------------------------	--------------------------------------

Table 2 Housing configuration

1A	Single housing (single length)	Suitable for 3000 litres reservoir	Number of elements	1 pcs element – (300 mm)
----	--------------------------------	------------------------------------	--------------------	--------------------------

Table 3 Length element

30	L = 300 mm	Standard
----	------------	----------

Table 5 Seal material

B	Buna-N	Standard
V	Viton	Optional

Table 4 Filter material

G1	Glass fiber, 1 micron, $\beta_1 \geq 200$	Standard
G3	Glass fiber, 3 micron, $\beta_3 \geq 200$	Optional
A5	Glass fiber with polymer, 5 micron, $\beta_5 \geq 200$	Optional

Table 6 Power supply options

0	230/400 VAC 50Hz / 255/460 VAC 60Hz	3 phase with PLC control	Standard
---	-------------------------------------	--------------------------	----------

Table 7 Pump options

60	1.0 cc/rev. group 1	Standard
----	---------------------	----------

Table 8 Heating element

0	2000 Watt	Standard
---	-----------	----------

Table 9 Extra functions

0	No extra functions
1	Including water sensor

Table 10 Options

0	No options
---	------------